SOLUTIONS TO CONCEPTS
CHAPTER 17

1. Given that, 400 m < λ < 700 nm.

$$\frac{1}{700\text{nm}} < \frac{1}{\lambda} < \frac{1}{400\text{nm}}$$

$$\Rightarrow \frac{1}{7\times10^{-7}} < \frac{1}{\lambda} < \frac{1}{4\times10^{-7}} \Rightarrow \frac{3\times10^{8}}{7\times10^{-7}} < \frac{c}{\lambda} < \frac{3\times10^{8}}{4\times10^{-7}}$$ (Where, c = speed of light = 3×10^8 m/s)

$\Rightarrow 4.3 \times 10^{14} < c/\lambda < 7.5 \times 10^{14}$

$\Rightarrow 4.3 \times 10^{14}$ Hz < f < 7.5×10^{14} Hz.

2. Given that, for sodium light, λ = 589 nm = 589×10^{-9} m

a) $f_a = \frac{3\times10^{8}}{589\times10^{-9}} = 5.09 \times 10^{14}$ sec^{-1} $\left[\because f = \frac{c}{\lambda}\right]$

b) $\frac{\mu_a}{\mu_w} = \frac{\lambda_w}{\lambda_a} \Rightarrow \frac{1}{1.33} = \frac{\lambda_w}{589\times10^{-9}} \Rightarrow \lambda_w = 443$ nm

c) $f_w = f_a = 5.09 \times 10^{14}$ sec^{-1} [Frequency does not change]

d) $\frac{\mu_a}{\mu_w} = \frac{v_w}{v_a} \Rightarrow v_w = \frac{\mu_a v_a}{\mu_w} = \frac{3\times10^{8}}{1.33} = 2.25 \times 10^{8}$ m/sec.

3. We know that, $\frac{\mu_2}{\mu_1} = \frac{v_1}{v_2}$

So, $\frac{1472}{1} = \frac{3\times10^{8}}{v_{400}} \Rightarrow v_{400} = 2.04\times10^{8}\,\text{m/sec.}$

[because, for air, μ = 1 and v = 3×10^8 m/s]

Again, $\frac{1452}{1} = \frac{3\times10^{8}}{v_{760}} \Rightarrow v_{760} = 2.07\times10^{8}\,\text{m/sec.}$

4. $\mu_t = \frac{1\times3\times10^{8}}{(2.4)\times10^{8}} = 1.25$ $\left[\text{since, } \mu = \frac{\text{velocity of light in vaccum}}{\text{velocity of light in the given medium}}\right]$

5. Given that, d = 1 cm = 10^{-2} m, λ = 5×10^{-7} m and D = 1 m

a) Separation between two consecutive maxima is equal to fringe width.

So, $\beta = \frac{\lambda D}{d} = \frac{5\times10^{-7}\times1}{10^{-2}}\text{m} = 5 \times 10^{-5}$ m = 0.05 mm.

b) When, β = 1 mm = 10^{-3} m

$10^{-3}\text{m} = \frac{5\times10^{-7}\times1}{D} \Rightarrow D = 5 \times 10^{-4}$ m = 0.50 mm.

6. Given that, β = 1 mm = 10^{-3} m, D = 2.t m and d = 1 mm = 10^{-3} m

So, $10^{-3}\text{m} = \frac{25\times\lambda}{10^{-3}} \Rightarrow \lambda = 4 \times 10^{-7}$ m = 400 nm.

7. Given that, d = 1 mm = 10^{-3} m, D = 1 m.

So, fringe with = $\frac{D\lambda}{d}$ = 0.5 mm.

a) So, distance of centre of first minimum from centre of central maximum = 0.5/2 mm = 0.25 mm

b) No. of fringes = 10 / 0.5 = 20.


8. Given that, d = 0.8 mm = 0.8×10^{-3} m, λ = 589 nm = 589×10^{-9} m and D = 2 m.

So, $\beta = \frac{D\lambda}{d} = \frac{589\times10^{-9}\times2}{0.8\times10^{-3}} = 1.47 \times 10^{-3}$ m = 147 mm.

---

9. Given that, λ = 500 nm = 500×10^{-9} m and d = 2×10^{-3} m

As shown in the figure, angular separation $\theta = \frac{\beta}{D} = \frac{\lambda D}{dD} = \frac{\lambda}{d}$



So, $\theta = \frac{\beta}{D} = \frac{\lambda}{d} = \frac{500\times10^{-9}}{2\times10^{-3}} = 250\times10^{-6}$

$= 25\times10^{-5}$ radian = 0.014 degree.



10. We know that, the first maximum (next to central maximum) occurs at $y = \frac{\lambda D}{d}$

Given that, $\lambda_1 = 480$ nm, $\lambda_2 = 600$ nm, D = 150 cm = 1.5 m and d = 0.25 mm = 0.25×10^{-3} m

So, $y_1 = \frac{D\lambda_1}{d} = \frac{1.5\times480\times10^{-9}}{0.25\times10^{-3}} = 2.88$ mm

$y_2 = \frac{1.5\times600\times10^{-9}}{0.25\times10^{-3}} = 3.6$ mm.

So, the separation between these two bright fringes is given by,

$\therefore$ separation = $y_2 - y_1 = 3.60 - 2.88 = 0.72$ mm.

11. Let m^{th} bright fringe of violet light overlaps with n^{th} bright fringe of red light.

$\therefore \frac{m\times400nm\times D}{d} = \frac{n\times700nm\times D}{d} \Rightarrow \frac{m}{n} = \frac{7}{4}$

$\Rightarrow 7^{th}$ bright fringe of violet light overlaps with 4^{th} bright fringe of red light (minimum). Also, it can be seen that 14^{th} violet fringe will overlap 8^{th} red fringe.

Because, m/n = 7/4 = 14/8.

12. Let, t = thickness of the plate

Given, optical path difference = $(\mu - 1)t = \lambda/2$

$\Rightarrow t = \frac{\lambda}{2(\mu-1)}$

13. a) Change in the optical path = $\mu t - t = (\mu - 1)t$

b) To have a dark fringe at the centre the pattern should shift by one half of a fringe.

$\Rightarrow (\mu - 1)t = \frac{\lambda}{2} \Rightarrow t = \frac{\lambda}{2(\mu-1)}$.

14. Given that, $\mu = 1.45$, t = 0.02 mm = 0.02×10^{-3} m and $\lambda = 620$ nm = 620×10^{-9} m

We know, when the transparent paper is pasted in one of the slits, the optical path changes by $(\mu - 1)t$.

Again, for shift of one fringe, the optical path should be changed by λ.

So, no. of fringes crossing through the centre is given by,

$n = \frac{(\mu-1)t}{\lambda} = \frac{0.45\times0.02\times10^{-3}}{620\times10^{-9}} = 14.5$

15. In the given Young's double slit experiment,

$\mu = 1.6$, t = 1.964 micron = 1.964×10^{-6} m

We know, number of fringes shifted = $\frac{(\mu-1)t}{\lambda}$

So, the corresponding shift = No.of fringes shifted × fringe width

$= \frac{(\mu-1)t}{\lambda}\times\frac{\lambda D}{d} = \frac{(\mu-1)tD}{d}$ ... (1)

Again, when the distance between the screen and the slits is doubled,

Fringe width = $\frac{\lambda(2D)}{d}$ ...(2)

From (1) and (2), $\frac{(\mu-1)tD}{d} = \frac{\lambda(2D)}{d}$

$\Rightarrow \lambda = \frac{(\mu-1)t}{\lambda} = \frac{(1.6-1)\times(1.964)\times10^{-6}}{2} = 589.2\times10^{-9} = 589.2$ nm.

16. Given that, $t_1 = t_2 = 0.5$ mm = 0.5×10^{-3} m, $\mu_m = 1.58$ and $\mu_p = 1.55$,


$\lambda = 590$ nm = 590×10^{-9} m, d = 0.12 cm = 12×10^{-4} m, D = 1 m

a) Fringe width = $\frac{D\lambda}{d} = \frac{1\times590\times10^{-9}}{12\times10^{-4}} = 4.91\times10^{-4}$ m.

b) When both the strips are fitted, the optical path changes by

$\Delta x = (\mu_m - 1)t_1 - (\mu_p - 1)t_2 = (\mu_m - \mu_p)t$


$= (1.58 - 1.55)\times(0.5)(10^{-3}) = 0.015\times10^{-13}$ m.



So, No. of fringes shifted = $\frac{0.015\times10^{-3}}{590\times10^{-3}}$ = 25.43.

⇒ There are 25 fringes and 0.43 th of a fringe.

⇒ There are 13 bright fringes and 12 dark fringes and 0.43 th of a dark fringe.



So, position of first maximum on both sides will be given by

∴ $x = 0.43 \times 4.91 \times 10^{-4} = 0.021$ cm

$x' = (1 - 0.43) \times 4.91 \times 10^{-4} = 0.028$ cm (since, fringe width = 4.91×10^{-4} m)

17. The change in path difference due to the two slabs is $(\mu_1 - \mu_2)t$ (as in problem no. 16).
For having a minimum at P_0, the path difference should change by $\lambda/2$.

So, $\Rightarrow \lambda/2 = (\mu_1 - \mu_2)t \Rightarrow t = \frac{\lambda}{2(\mu_1 - \mu_2)}$.

18. Given that, $t = 0.02$ mm $= 0.02 \times 10^{-3}$ m, $\mu_1 = 1.45$, $\lambda = 600$ nm $= 600 \times 10^{-9}$ m

a) Let, I_1 = Intensity of source without paper = I

b) Then I_2 = Intensity of source with paper = (4/9)I

$\Rightarrow \frac{I_1}{I_2} = \frac{9}{4} \Rightarrow \frac{r_1}{r_2} = \frac{3}{2}$ [because $I \propto r^2$]

where, r_1 and r_2 are corresponding amplitudes.

So, $\frac{I_{max}}{I_{min}} = \frac{(r_1 + r_2)^2}{(r_1 - r_2)^2} = 25 : 1$


b) No. of fringes that will cross the origin is given by,

$n = \frac{(\mu - 1)t}{\lambda} = \frac{(1.45 - 1)\times 0.02 \times 10^{-3}}{600 \times 10^{-9}} = 15.$

19. Given that, $d = 0.28$ mm $= 0.28 \times 10^{-3}$ m, $D = 48$ cm $= 0.48$ m, $\lambda_a = 700$ nm in vacuum
Let, λ_w = wavelength of red light in water
Since, the fringe width of the pattern is given by,

$\beta = \frac{\lambda_w D}{d} = \frac{525\times10^{-9}\times0.48}{0.28\times10^{-3}} = 9 \times 10^{-4}$ m = 0.90 mm.

20. It can be seen from the figure that the wavefronts reaching O from S_1 and S_2 will have a path difference of S_2X.




In the ΔS_1S_2X,

$\sin\theta = \frac{S_2X}{S_1S_2}$

So, path difference = $S_2X = S_1S_2 \sin\theta = d\sin\theta = d \times \lambda/2d = \lambda/2$

As the path difference is an odd multiple of $\lambda/2$, there will be a dark fringe at point P_0.

21. a) Since, there is a phase difference of π between direct light and reflecting light, the intensity just above the mirror will be zero.



b) Here, 2d = equivalent slit separation
D = Distance between slit and screen.

We know for bright fringe, $\Delta x = \frac{y \times 2d}{D} = n\lambda$

But as there is a phase reversal of $\lambda/2$.

$\Rightarrow \frac{y\times2d}{D} + \frac{\lambda}{2} = n\lambda \qquad \Rightarrow \frac{y\times2d}{D} = n\lambda - \frac{\lambda}{2} \Rightarrow y = \frac{\lambda D}{4d}$

22. Given that, $D = 1$ m, $\lambda = 700$ nm $= 700 \times 10^{-9}$ m
Since, $a = 2$ mm, $d = 2a = 2$mm $= 2 \times 10^{-3}$ m (L loyd's mirror experiment)

Fringe width = $\frac{\lambda D}{d} = \frac{700\times10^{-9}\,m\times1m}{2\times10^{-3}\,m} = 0.35$ mm.

23. Given that, the mirror reflects 64% of energy (intensity) of the light.

So, $\frac{I_1}{I_2} = 0.64 = \frac{16}{25} \Rightarrow \frac{r_1}{r_2} = \frac{4}{5}$

So, $\frac{I_{max}}{I_{min}} = \frac{(r_1 + r_2)^2}{(r_1 - r_2)^2} = 81 : 1.$


24. It can be seen from the figure that, the apparent distance of the screen from the slits is

24. It can be seen from the figure that, the apparent distance of the screen from the slits is,

$D = 2D_1 + D_2$

So, Fringe width = $\frac{D\lambda}{d} = \frac{(2D_1 + D_2)\lambda}{d}$

25. Given that, λ = (400 nm to 700 nm), d = 0.5 mm = 0.5×10^{-3} m,
D = 50 cm = 0.5 m and on the screen y_n = 1 mm = 1×10^{-3} m

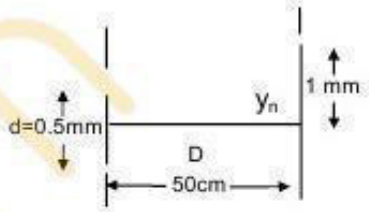

a) We know that for zero intensity (dark fringe)

$y_n = \left(\frac{2n+1}{2}\right)\frac{\lambda_n D}{d}$ where n = 0, 1, 2, ...

$$\Rightarrow \lambda_n = \frac{2}{(2n+1)}\frac{\lambda_n d}{D} = \frac{2}{2n+1} \times \frac{10^{-3} \times 0.5 \times 10^{-3}}{0.5} \Rightarrow \frac{2}{(2n+1)} \times 10^{-6}\,m = \frac{2}{(2n+1)} \times 10^{3}\,nm$$

If n = 1, $\lambda_1 = (2/3) \times 1000 = 667$ nm

If n = 1, $\lambda_2 = (2/5) \times 1000 = 400$ nm

So, the light waves of wavelengths 400 nm and 667 nm will be absent from the out coming light.

b) For strong intensity (bright fringes) at the hole

$y_n = \frac{n\lambda_n D}{d} \Rightarrow \lambda_n = \frac{y_n d}{nD}$

When, n = 1, $\lambda_1 = \frac{y_n d}{D} = \frac{10^{-3} \times 0.5 \times 10^{-3}}{0.5} = 10^{-6}\,m = 1000nm$.

1000 nm is not present in the range 400 nm – 700 nm


Again, where n = 2, $\lambda_2 = \frac{y_n d}{2D}$ = 500 nm

So, the only wavelength which will have strong intensity is 500 nm.

26. From the diagram, it can be seen that at point O.

Path difference = (AB + BO) – (AC + CO)

= 2(AB – AC) [Since, AB = BO and AC = CO] = $2(\sqrt{d^2 + D^2} - D)$



For dark fringe, path difference should be odd multiple of $\lambda/2$.

So, $2(\sqrt{d^2 + D^2} - D) = (2n + 1)(\lambda/2)$

$\Rightarrow \sqrt{d^2 + D^2} = D + (2n + 1)\,\lambda/4$

$\Rightarrow D^2 + d^2 = D^2 + (2n+1)^2\,\lambda^2/16 + (2n + 1)\,\lambda D/2$

Neglecting, $(2n+1)^2\,\lambda^2/16$, as it is very small


We get, $d = \sqrt{(2n+1)\frac{\lambda D}{2}}$

For minimum 'd', putting n = 0 $\Rightarrow d_{min} = \sqrt{\frac{\lambda D}{2}}$.

27. For minimum intensity

$\therefore S_1P - S_2P = x = (2n + 1)\,\lambda/2$

From the figure, we get

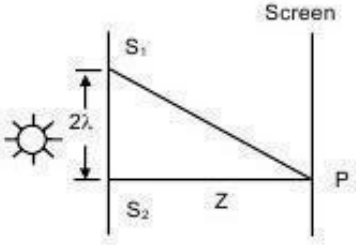

$$\Rightarrow \sqrt{Z^2 + (2\lambda)^2} - Z = (2n+1)\frac{\lambda}{2}$$

$$\Rightarrow Z^2 + 4\lambda^2 = Z^2 + (2n+1)^2\frac{\lambda^2}{4} + Z(2n+1)\lambda$$

$$\Rightarrow Z = \frac{4\lambda^2 - (2n+1)^2(\lambda^2/4)}{(2n+1)\lambda} = \frac{16\lambda^2 - (2n+1)^2\lambda^2}{4(2n+1)\lambda} \quad ...(1)$$

Putting, n = 0 $\Rightarrow$ Z = 15λ/4 n = –1 $\Rightarrow$ Z = –15λ/4


n = 1 $\Rightarrow$ Z = 7λ/12 n = 2 $\Rightarrow$ Z = –9λ/20

$\therefore$ Z = 7λ/12 is the smallest distance for which there will be minimum intensity.


28. Since S_1, S_2 are in same phase, at O there will be maximum intensity.

Given that, there will be a maximum intensity at P.

$\Rightarrow$ path difference = $\Delta x = n\lambda$



From the figure,



$(S_1P)^2 - (S_2P)^2 = (\sqrt{D^2 + X^2})^2 - (\sqrt{(D-2\lambda)^2 + X^2})^2$

$= 4\lambda D - 4\lambda^2 = 4\ \lambda D$ (λ^2 is so small and can be neglected)

$\Rightarrow S_1P - S_2P = \dfrac{4\lambda D}{2\sqrt{x^2 + D^2}} = n\lambda$

$\Rightarrow \dfrac{2D}{\sqrt{x^2 + D^2}} = \nu$


$\Rightarrow n^2 (X^2 + D^2) = 4D^2 = \Delta X = \dfrac{D}{n}\sqrt{4 - n^2}$

when n = 1, $x = \sqrt{3}\ D$ (1^{st} order)

n = 2, x = 0 (2^{nd} order)

$\therefore$ When $X = \sqrt{3}\ D$, at P there will be maximum intensity.

29. As shown in the figure,



$(S_1P)^2 = (PX)^2 + (S_1X)^2$ ...(1)

$(S_2P)^2 = (PX)^2 + (S_2X)^2$ ...(2)

From (1) and (2),

$(S_1P)^2 - (S_2P)^2 = (S_1X)^2 - (S_2X)^2$

$= (1.5\ \lambda + R\cos\theta)^2 - (R\cos\theta - 15\ \lambda)^2$

$= 6\lambda\ R\cos\theta$

$\Rightarrow (S_1P - S_2P) = \dfrac{6\lambda R\cos\theta}{2R} = 3\lambda\cos\theta.$


For constructive interference,

$(S_1P - S_2P)^2 = x = 3\lambda\cos\theta = n\lambda$

$\Rightarrow \cos\theta = n/3 \Rightarrow \theta = \cos^{-1}(n/3)$, where n = 0, 1, 2, ...

$\Rightarrow \theta = 0°, 48.2°, 70.5°, 90°$ and similar points in other quadrants.

30. a) As shown in the figure, $BP_0 - AP_0 = \lambda/3$



$\Rightarrow \sqrt{(D^2 + d^2)} - D = \lambda/3$

$\Rightarrow D^2 + d^2 = D^2 + (\lambda^2/9) + (2\lambda D)/3$

$\Rightarrow d = \sqrt{(2\lambda D)/3}$ (neglecting the term $\lambda^2/9$ as it is very small)

b) To find the intensity at P_0, we have to consider the interference of light waves coming from all the three slits.

Here, $CP_0 - AP_0 = \sqrt{D^2 + 4d^2} - D$

$= \sqrt{D^2 + \dfrac{8\lambda D}{3}} - D = D\left\{1 + \dfrac{8\lambda}{3D}\right\}^{1/2} - D$

$= D\left\{1 + \dfrac{8\lambda}{3D \times 2} + ...\right\} - D = \dfrac{4\lambda}{3}$ [using binomial expansion]

So, the corresponding phase difference between waves from C and A is,

$\phi_c = \dfrac{2\pi x}{\lambda} = \dfrac{2\pi \times 4\lambda}{3\lambda} = \dfrac{8\pi}{3} = \left(2\pi + \dfrac{2\pi}{3}\right) = \dfrac{2\pi}{3}$ ...(1)

Again, $\phi_B = \dfrac{2\pi x}{3\lambda} = \dfrac{2\pi}{3}$ ...(2)

So, it can be said that light from B and C are in same phase as they have some phase difference with respect to A.

So, R $= \sqrt{(2r)^2 + r^2 + 2 \times 2r \times r\cos(2\pi/3)}$ (using vector method)

$= \sqrt{4r^2 + r^2 - 2r^2} = \sqrt{3r}$

$\therefore I_{P_0} - K(\sqrt{3r})^2 = 3Kr^2 = 3I$

As, the resulting amplitude is $\sqrt{3}$ times, the intensity will be three times the intensity due to individual slits.

31. Given that, $d = 2\ mm = 2 \times 10^{-3}\ m$, $\lambda = 600\ nm = 6 \times 10^{-7}\ m$, $I_{max} = 0.20\ W/m^2$, D = 2m

For the point, y = 0.5 cm

We know, path difference = $x = \dfrac{yd}{D} = \dfrac{0.5 \times 10^{-2} \times 2 \times 10^{-3}}{2} = 5 \times 10^{-6}\ m$

So, the corresponding phase difference is,

$$\phi = \frac{2\pi x}{\lambda} = \frac{2\pi \times 5\times10^{-6}}{6\times10^{-7}} \Rightarrow \frac{50\pi}{3} = 16\pi + \frac{2\pi}{3} \Rightarrow \phi = \frac{2\pi}{3}$$

So, the amplitude of the resulting wave at the point y = 0.5 cm is,

$$A = \sqrt{r^2 + r^2 + 2r^2\cos(2\pi/3)} = \sqrt{r^2 + r^2 - r^2} = r$$

Since, $\frac{I}{I_{max}} = \frac{A^2}{(2r)^2}$ [since, maximum amplitude = 2r]

$$\Rightarrow \frac{I}{0.2} = \frac{A^2}{4r^2} = \frac{r^2}{4r^2}$$

$$\Rightarrow I = \frac{0.2}{4} = 0.05 \text{ W/m}^2.$$

32. i) When intensity is half the maximum $\frac{I}{I_{max}} = \frac{1}{2}$

$$\Rightarrow \frac{4a^2\cos^2(\phi/2)}{4a^2} = \frac{1}{2}$$

$$\Rightarrow \cos^2(\phi/2) = 1/2 \Rightarrow \cos(\phi/2) = 1/\sqrt{2}$$

$\Rightarrow \phi/2 = \pi/4 \Rightarrow \phi = \pi/2$

$\Rightarrow$ Path difference, $x = \lambda/4$

$\Rightarrow y = xD/d = \lambda D/4d$

ii) When intensity is 1/4th of the maximum $\frac{I}{I_{max}} = \frac{1}{4}$

$$\Rightarrow \frac{4a^2\cos^2(\phi/2)}{4a^2} = \frac{1}{4}$$

$$\Rightarrow \cos^2(\phi/2) = 1/4 \Rightarrow \cos(\phi/2) = 1/2$$

$\Rightarrow \phi/2 = \pi/3 \Rightarrow \phi = 2\pi/3$

$\Rightarrow$ Path difference, $x = \lambda/3$

$\Rightarrow y = xD/d = \lambda D/3d$

33. Given that, D = 1 m, d = 1 mm = 10^{-3} m, λ = 500 nm = 5×10^{-7} m

For intensity to be half the maximum intensity.

$$y = \frac{\lambda D}{4d}$$ (As in problem no. 32)

$$\Rightarrow y = \frac{5\times10^{-7}\times1}{4\times10^{-3}} \Rightarrow y = 1.25 \times 10^{-4} \text{ m}.$$

34. The line width of a bright fringe is sometimes defined as the separation between the points on the two sides of the central line where the intensity falls to half the maximum.

We know that, for intensity to be half the maximum

$$y = \pm\frac{\lambda D}{4d}$$

$$\therefore \text{ Line width} = \frac{\lambda D}{4d} + \frac{\lambda D}{4d} = \frac{\lambda D}{2d}.$$

35. i) When, $z = \lambda D/2d$, at S_4, minimum intensity occurs (dark fringe)

$\Rightarrow$ Amplitude = 0,


At S_3, path difference = 0

$\Rightarrow$ Maximum intensity occurs.

$\Rightarrow$ Amplitude = 2r.

So, on $\Sigma 2$ screen,

$$\frac{I_{max}}{I_{min}} = \frac{(2r+0)^2}{(2r-0)^2} = 1$$

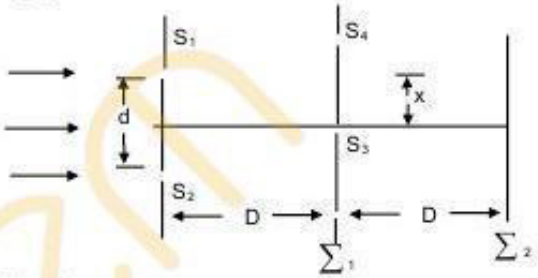

ii) When, $z = \lambda D/2d$, At S_4, minimum intensity occurs. (dark fringe)

$\Rightarrow$ Amplitude = 0.

At S_3, path difference = 0

$\Rightarrow$ Maximum intensity occurs.

$\Rightarrow$ Amplitude = 2r.

So, on $\Sigma 2$ screen,

$$\frac{I_{max}}{I_{min}} = \frac{(2r+2r)^2}{(2r-0)^2} = \infty$$

iii) When, $z = \lambda D/4d$, At S_4, intensity = $I_{max}/2$

$\Rightarrow$ Amplitude = $\sqrt{2r}$.

$\therefore$ At S_3, intensity is maximum.

$\Rightarrow$ Amplitude = 2r

$$\therefore \frac{I_{max}}{I_{min}} = \frac{(2r+\sqrt{2r})^2}{(2r-\sqrt{2r})^2} = 34.$$

36. a) When, $z = D\lambda/d$


So, $OS_3 = OS_4 = D\lambda/2d \Rightarrow$ Dark fringe at S_3 and S_4.

$\Rightarrow$ At S_3, intensity at $S_3 = 0 \Rightarrow I_1 = 0$

At S_4, intensity at $S_4 = 0 \Rightarrow I_2 = 0$

At P, path difference = 0 $\Rightarrow$ Phase difference = 0.

$\Rightarrow I = I_1 + I_2 + \sqrt{I_1 I_2}\cos 0° = 0 + 0 + 0 = 0 \Rightarrow$ Intensity at P = 0.

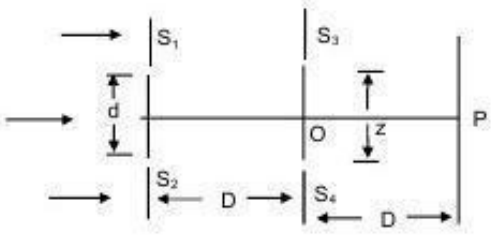

b) Given that, when $z = D\lambda/2d$, intensity at P = I

Here, $OS_3 = OS_4 = y = D\lambda/4d$

$$\therefore \phi = \frac{2\pi x}{\lambda} = \frac{2\pi}{\lambda}\times\frac{yd}{D} = \frac{2\pi}{\lambda}\times\frac{D\lambda}{4d}\times\frac{d}{D} = \frac{\pi}{2}.$$ [Since, x = path difference = yd/D]

Let, intensity at S_3 and S_4 = I'

$\therefore$ At P, phase difference = 0

So, $I' + I' + 2I'\cos 0° = I$.

$\Rightarrow 4I' = I \Rightarrow I' = 1/4$.

When, $z = \frac{3D\lambda}{2d}$, $\Rightarrow y = \frac{3D\lambda}{4d}$

$$\therefore \phi = \frac{2\pi x}{\lambda} = \frac{2\pi}{\lambda}\times\frac{yd}{D} = \frac{2\pi}{\lambda}\times\frac{3D\lambda}{4d}\times\frac{d}{D} = \frac{3\pi}{2}$$

Let, I'' be the intensity at S_3 and S_4 when, $\phi = 3\pi/2$

Now comparing,

$$\frac{I''}{I} = \frac{a^2+a^2+2a^2\cos(3\pi/2)}{a^2+a^2+2a^2\cos\pi/2} = \frac{2a^2}{2a^2} = 1 \qquad \Rightarrow I'' = I' = I/4.$$

$\therefore$ Intensity at P = I/4 + I/4 + 2 × (I/4) cos 0° = I/2 + I/2 = I.

c) When $z = 2D\lambda/d$

$\Rightarrow y = OS_3 = OS_4 = D\lambda/d$

$$\therefore \phi = \frac{2\pi x}{\lambda} = \frac{2\pi}{\lambda}\times\frac{yd}{D} = \frac{2\pi}{\lambda}\times\frac{D\lambda}{d}\times\frac{d}{D} = 2\pi.$$

Let, I''' = intensity at S_3 and S_4 when, $\phi = 2\pi$.

$$\frac{I'''}{I'} = \frac{a^2+a^2+2a^2\cos 2\pi}{a^2+a^2+2a^2\cos\pi/2} = \frac{4a^2}{2a^2} = 2$$

$\Rightarrow I''' = 2I' = 2(I/4) = I/2$

At P, $I_{resultant} = I/2 + I/2 + 2(I/2)\cos 0° = I + I = 2I$.

So, the resultant intensity at P will be 2I.

37. Given $d = 0.0011 \times 10^{-3}$ m

For minimum reflection of light, $2\mu d = n\lambda$

$$\Rightarrow \mu = \frac{n\lambda}{2d} = \frac{2n\lambda}{4d} = \frac{580\times10^{-9}\times 2n}{4\times11\times10^{-7}} = \frac{5.8}{44}(2n) = 0.132\,(2n)$$

Given that, μ has a value in between 1.2 and 1.5.

$\Rightarrow$ When, n = 5, $\mu = 0.132 \times 10 = 1.32$.

38. Given that, $\lambda = 560 \times 10^{-9}$ m, $\mu = 1.4$.

For strong reflection, $2\mu d = (2n+1)\lambda/2 \Rightarrow d = \frac{(2n+1)\lambda}{4d}$

For minimum thickness, putting n = 0.

$\Rightarrow d = \frac{\lambda}{4d} \Rightarrow d = \frac{560\times10^{-9}}{14} = 10^{-7}$ m = 100 nm.

39. For strong transmission, $2\mu d = n\lambda \Rightarrow \lambda = \frac{2\mu d}{n}$

Given that, $\mu = 1.33$, $d = 1\times10^{-4}$ cm $= 1\times10^{-6}$ m.

$\Rightarrow \lambda = \frac{2\times1.33\times1\times10^{-6}}{n} = \frac{2660\times10^{-9}}{n}$m

when, $n = 4, \lambda_1 = 665$ nm

$n = 5, \lambda_2 = 532$ nm

$n = 6, \lambda_3 = 443$ nm

40. For the thin oil film,

$d = 1\times10^{-4}$ cm $= 10^{-6}$ m, $\mu_{oil} = 1.25$ and $\mu_x = 1.50$

$\lambda = \frac{2\mu d}{(n+1/2)} \frac{2\times10^{-6}\times1.25\times2}{2n+1} = \frac{5\times10^{-6}m}{2n+1}$

$\Rightarrow \lambda = \frac{5000\text{ nm}}{2n+1}$

For the wavelengths in the region (400 nm – 750 nm)

When, $n = 3, \lambda = \frac{5000}{2\times3+1} = \frac{5000}{7} = 714.3$ nm

When, $n = 4, \lambda = \frac{5000}{2\times4+1} = \frac{5000}{9} = 555.6$ nm

When, $n = 5, \lambda = \frac{5000}{2\times5+1} = \frac{5000}{11} = 454.5$ nm

41. For first minimum diffraction, $b \sin\theta = \lambda$

Here, $\theta = 30°$, $b = 5$ cm

$\therefore \lambda = 5\times\sin 30° = 5/2 = 2.5$ cm.

42. $\lambda = 560$ nm $= 560\times10^{-9}$ m, $b = 0.20$ mm $= 2\times10^{-4}$ m, $D = 2$ m

Since, $R = 1.22\frac{\lambda D}{b} = 1.22\times\frac{560\times10^{-9}\times2}{2\times10^{-4}} = 6.832\times10^{-3}$ M = 0.683 cm.

So, Diameter = 2R = 1.37 cm.

43. $\lambda = 620$ nm $= 620\times10^{-9}$ m,

$D = 20$ cm $= 20\times10^{-2}$ m, $b = 8$ cm $= 8\times10^{-2}$ m

$\therefore R = 1.22\times\frac{620\times10^{-4}\times20\times10^{-2}}{8\times10^{-2}} = 1891\times10^{-9} = 1.9\times10^{-6}$ m

So, diameter = 2R = 3.8×10^{-6} m