

NCERT SOLUTIONS

CLASS - 11th



aglasem.com

Class : 11th
Subject : Physics
Chapter : 7
Chapter Name : System of particles and Rotational Motion

Q7.1 Give the location of the centre of mass of a (i) sphere, (ii) cylinder, (iii) ring, and (iv) cube, each of uniform mass density. Does the centre of mass of a body necessarily lie inside the body?

Answer. Geometric centre; No

The centre of mass (C.M.) is a point where the mass of a body is supposed to be concentrated. For the given geometric shapes having a uniform mass density, the C.M. lies at their respective geometric centres. The centre of mass of a body need not necessarily lie within it. For example, the C.M. of bodies such as a ring, a hollow sphere, etc., lies outside the body.

Page : 178 , Block Name : ExerciseQ7.2 In the HCl molecule, the separation between

the nuclei of the two atoms is about 1.27 Å (1 Å = 10^{-10} m). Find the approximate location of the CM of the molecule, given that a chlorine atom is about 35.5 times as massive as a hydrogen atom and nearly all the mass of an atom is concentrated in its nucleus.

Answer. Let us choose the nucleus of the hydrogen atom as the origin for measuring distance. Mass of hydrogen atom, $m_1 = 1$ unit (say). Since chlorine atom is 35.5 times as massive as hydrogen atom, mass of chlorine atom, $m_2 = 35.5$ units

Quantity	Number	Significant Figure
l	4.234	4
b	1.005	4
h	2.01	3

$$x_1 = 0 \text{ and } x_2 = 1.27 \text{ Å} = 1.27 \times 10^{-10} \text{ m}$$

Distance of centre of mass of HCl molecule from the origin is given by

$$\begin{aligned} X &= \frac{m_1 x_1 + m_2 x_2}{m_1 + m_2} = \frac{1 \times 0 + 35.5 \times 1.27 \times 10^{-10}}{1 + 35.5} \text{ m} \\ &= \frac{35.5 \times 1.27}{36.5} \times 10^{-10} \text{ m} = 1.235 \times 10^{-10} \text{ m} = 1.235 \text{ Å} \end{aligned}$$

Page : 178 , Block Name : Exercise

Q7.3 child sits stationary at one end of a long trolley moving uniformly with a speed V on a smooth horizontal floor. If the child gets up and runs about on the trolley in any manner, what is the speed of the CM of the (trolley + child) system?


Answer. No change The child is running arbitrarily on a trolley moving with velocity v . However, the running of the child will produce no effect on the velocity of the centre of mass of the trolley. This is because the force due to the boy's motion is purely internal. Internal forces produce no effect on the motion of the bodies on which they act. Since no external force is involved in the boy–trolley system, the boy's motion will produce no change in the velocity of the centre of mass of the trolley.

Page : 178 , Block Name : Exercise

Q7.4 Show that the use of the triangle contained between the vectors a and b is one half of the magnitude of $a \times b$.

Answer.

Let $\vec{a}$ be represented $\vec{OP}$ and $\vec{b}$ be represented by $\vec{OQ}$. Let $\angle POQ = \theta$, Fig.

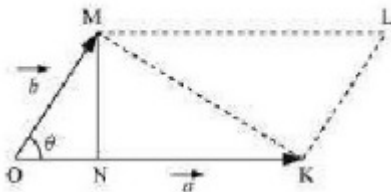

Complete the parallelogram OPRQ. Join PQ .

Draw $QN \perp OP$

$$\text{In } \triangle OQN, \quad \sin \theta = \frac{QN}{OQ} = \frac{QN}{b}$$

$$QN = b \sin \theta$$

$$\begin{aligned} \text{Now, by definition, } |\vec{a} \times \vec{b}| &= ab \sin \theta = (OP)(QN) \\ &= \frac{2(OP)(QN)}{2} = 2 \times \text{area of } \triangle OPQ \end{aligned}$$


$$\therefore \text{ area of } \triangle OPQ = \frac{1}{2} |\vec{a} \times \vec{b}|$$

which was to be proved.

Page : 178 , Block Name : Exercise

Q7.5 Show that $a \cdot (b \times c)$ is equal in magnitude to the volume of the parallelepiped formed on the three vectors, a , b and c .

Answer. A parallelepiped with origin O and sides a , b , and c shown is in the following figure.

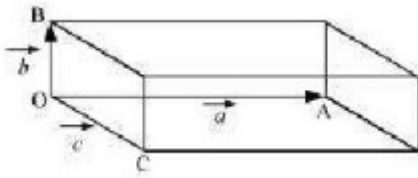

Volume of the given parallelepiped = abc

$$\vec{OC} = \vec{a}$$

$$\vec{OB} = \vec{b}$$

$$\vec{OC} = \vec{c}$$

Let $\hat{n}$ be a unit vector perpendicular to both b and c . Hence, $\hat{n}$ and a have the same direction.

$$\therefore \vec{b} \times \vec{c} = bc \sin \theta \hat{n}$$

$$= bc \sin 90^\circ \hat{n}$$

$$= bc \hat{n}$$

$$\vec{a} \cdot (\vec{b} \times \vec{c})$$

$$= a \cdot (bc \hat{n})$$

$$\vec{a} \cdot (\vec{b} \times \vec{c})$$

$$= a \cdot (bc \hat{n})$$

$$= abc \cos \theta$$

$$= abc \cos 0^\circ$$

$$= abc$$

$$= \text{Volume of the parallelepiped}$$

Page : 178 , Block Name : Exercise

Q7.6 Find the components along the x, y, z-axes of the angular momentum L of a particle, whose position vector is r with components x, y, z and momentum is p with components p_x, p_y and p_z . Show that if the particle moves only in the x-y plane the angular momentum has only a z- component.

Answer.

$$l_x = y p_z - z p_y$$

$$l_y = z p_x - x p_z$$

$$l_z = x p_y - y p_x$$

Linear momentum of the particle, $\vec{p} = p_x \hat{i} + p_y \hat{j} + p_z \hat{k}$

Position vector of the particle, $\vec{r} = x \hat{i} + y \hat{j} + z \hat{k}$

Angular momentum, $\vec{l} = \vec{r} \times \vec{p}$

$$= (x \hat{i} + y \hat{j} + z \hat{k}) \times (p_x \hat{i} + p_y \hat{j} + p_z \hat{k})$$

Comparing the coefficients of $\hat{i}$, and $\hat{k}$, we get:

$$\left. \begin{aligned} l_x &= yp_x - zp_y \\ l_y &= xp_z - zp_x \\ l_z &= xp_y - yp_x \end{aligned} \right\}$$

The particle moves in the x-y plane Hence, the z-component of the position vector and linear momentum vector becomes zero i.e.,


$$\left. \begin{aligned} l_x &= 0 \\ l_y &= 0 \\ l_z &= xp_y - yp_x \end{aligned} \right\}$$

Therefore, when the particle is confined to move in the x-y plane, the direction of angular momentum is along the z-direction.

Page : 178 , Block Name : Exercise

Q7.7 Two particles, each of mass m and speed v , travel in opposite directions along parallel lines separated by distance d . Show that the vector angular momentum of the two particle system is the same whatever be the point about which the angular momentum is taken.

Answer. Let at a certain instant two particles be at points P and Q, as shown in the following figure,

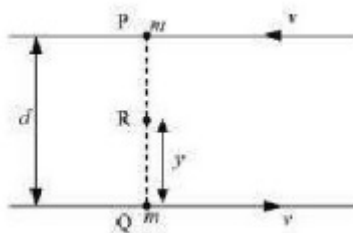

Angular momentum of the system about point P:

$$\begin{aligned} \vec{L}_P &= mv \times 0 + mv \times d \\ &= mnd \end{aligned}$$

Angular momentum of the system about point Q:

$$\begin{aligned} \vec{L}_Q &= mv \times d + mv \times 0 \\ &= md \end{aligned}$$

$$QR = y$$

$$\therefore PR = d - y$$

Angular momentum of the system about point R:

$$\begin{aligned} \vec{L}_R &= mv \times (d - y) + mv \times y \\ &= mvd - mvy + mvy \\ &= mnd \end{aligned}$$

Comparing equations (i), (ii) and (iii), we get:

$$\vec{L}_P = \vec{L}_Q = \vec{L}_R$$

We infer from equation (W) that the angular momentum of a system does not depend on the point about which it is taken.


Q7.8

A non-uniform bar of weight W is suspended at rest by two strings of negligible weight as shown in Fig. The angles made by the strings with the vertical are 36.9° and 53.2° respectively. The bar is 2m long.

Calculate the distance d of the centre of gravity of the bar from its left end.



Answer.

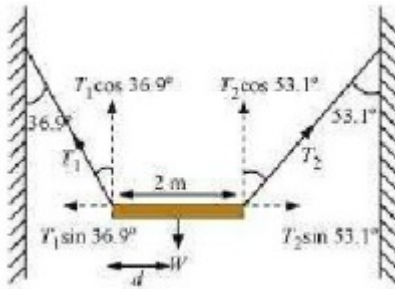

Length of the bar, $l = 2\text{m}$

T_1 and T_2 are the tensions produced in the left and right strings respectively.

At translational equilibrium, we have

$$T_1 \sin 36.9^\circ = T_2 \sin 53.1^\circ$$

$$\frac{T_1}{T_2} = \frac{\sin 53.1^\circ}{\sin 36.9^\circ}$$

$$= \frac{0.800}{0.600} = \frac{4}{3}$$

For rotational equilibrium, on taking the torque about the centre of gravity, we have:

$$T_1 \cos 36.9^\circ \times d = T_2 \cos 53.1^\circ (2 - d)$$

$$T_1 \times 0.800d = T_2 0.600(2 - d)$$

$$\frac{4}{3} \times T_2 \times 0.800d = T_2 [0.600 \times 2 - 0.600d]$$

$$1.067d + 0.6d = 1.2$$

$$\therefore d = \frac{1.2}{1.67}$$

$$= 0.72\text{m}$$

Hence, the C.G. (centre of gravity) of the given bar lies 0.72 m from its left end.

Q7.9 A car weighs 1800 kg. The distance between its front and back axles is 1.8 m. Its centre of gravity is 1.05 m behind the front axle. Determine the force exerted by the level ground on each front wheel and each back wheel.

Answer.

Answer: Let F_1 and F_2 be the forces exerted by the level ground on front wheels and back wheels respectively. Considering rotational equilibrium about the front wheels, $F_2 \times 1.8 = mg \times 1.05$ or $F_2 = 1.05/1.8 \times 1800 \times 9.8 \text{ N} = 10299 \text{ N}$ Force on each back wheel is $= 10299/2 \text{ N}$ or 5149.5 N .

$$F_1 \times 1.8 = mg(1.8 - 1.05) = 0.75 \times 1800 \times 9.8$$

$$\text{or } F_1 = 0.75 \times 1800 \times 9.8/1.8 = 7350 \text{ N}$$

Force on each front wheel is $7350/2 \text{ N}$ or 3675 N .


Page : 178 , Block Name : Exercise

Q7.10 (a) Find the moment of inertia of a sphere about a tangent to the sphere, given the moment of inertia of the sphere about any of its diameters to be $\frac{2}{5}MR^2$, where M is the mass of the sphere and R is the radius of the sphere.

(b) Given the moment of inertia of a disc of mass M and radius R about any of its diameters to be $\frac{1}{4}MR^2$, find the moment of inertia about an axis normal to the disc passing through a point on its edge.

Answer. (a) $\frac{7}{5}MR^2$

The moment of inertia (M.I.) of a sphere about its diameter $= \frac{2}{5}MR^2$

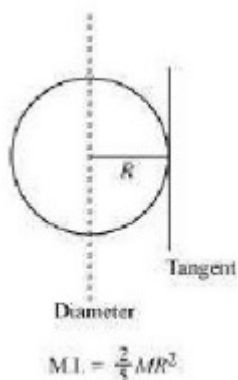

According to the theorem of parallel axes, the moment of inertia of a body about any axis is equal to the sum of the moment of inertia of the body about a parallel axis passing through its centre of mass and the product of its mass and the square of the distance between the two parallel axes.

The M.I. about a tangent of the sphere $= \frac{2}{5}MR^2 + MR^2 = \frac{7}{5}MR^2$

(b) $\frac{3}{2}MR^2$


The moment of inertia of a disc about its diameter $= \frac{1}{4}MR^2$

According to the theorem of perpendicular axis, the moment of inertia of a planar body (lamina) about an axis perpendicular to its plane is equal to the sum of its moments of Inertia

about two perpendicular axes concurrent with perpendicular axis and lying in the plane of the body.

$$\text{The M.I. of the disc about its centre} = \frac{1}{4}MR^2 + \frac{1}{4}MR^2 = \frac{1}{2}MR^2$$

The situation is shown in the given figure.



Applying the theorem of parallel axes:

$$\begin{aligned} \text{The moment of inertia of out axis normal to the disc md passing through a point on} \\ = \frac{1}{2}MR^2 + MR^2 = \frac{3}{2}MR^2 \end{aligned}$$

Page : 178 , Block Name : Exercise

Q7.11 Torques of equal magnitude are applied to a hollow cylinder and a solid sphere, both having the same mass and radius. The cylinder is free to rotate about its standard axis of symmetry, and the sphere is free to rotate about an axis passing through its centre. Which Of the two will acquire a greater angular speed after a given time?

Answer.

Let M be the mass and R the radius of the hollow cylinder, and also of the solid sphere. Their moments of inertia about the respective axes are $I_1 = MR^2$ and $I_2 = \frac{2}{5}MR^2$

Let T be the magnitude of the torque applied to the cylinder and the sphere, producing angular accelerations α_1 and α_2 respectively. Then $T = I_1\alpha_1 = I_2\alpha_2$ The angular acceleration produced in the sphere is larger. Hence, the sphere will acquire larger angular speed after a given time

Page : 179 , Block Name : Exercise

Q7.12 A solid cylinder of mass 20 kg rotates about its axis with angular speed 100 rad s^{-1} . The radius of the cylinder is 0.25 m. What is the kinetic energy associated with the rotation of the cylinder? What is the magnitude of angular momentum of the cylinder about its axis?

Answer.

$$M = 20\text{kg}$$

$$\text{Angular speed, } \omega = 100\text{rad s}^{-1}; R = 0.25\text{m}$$

Moment of inertia of the cylinder about its axis

$$= \frac{1}{2}MR^2 = \frac{1}{2} \times 20(0.25)^2\text{kg m}^2 = 0.625\text{kg m}^2$$

Rotational kinetic energy.

$$E_r = \frac{1}{2}I\omega^2 = \frac{1}{2} \times 0.625 \times (100)^2\text{J} = 3125\text{J}$$

Angular momentum,

$$L = I\omega = 0.625 \times 100\text{J s} = 62.5\text{J s}$$

Page : 179 , Block Name : Exercise

Q7.13 (a) A child stands at the centre of a turntable with his arms outstretched. The turntable is set rotating with an angular speed of 40 rev/min. How much is the angular speed of the child if he folds his hands back and thereby reduces his moment of inertia to $\frac{2}{5}$ times the initial value? Assume that the turntable rotates without friction, (b) Show that the child's new kinetic energy of rotation is more than the initial kinetic energy of rotation. How do you account of this increase in kinetic energy?

Answer. (a) Suppose, initial moment of inertia of the child is I_1 Then final moment of inertia,

$$I_2 = \frac{2}{5}I_1$$

$$\omega_1 = 40\text{rev min}^{-1}$$

$$I_1\omega_1 = I_2\omega_2 \text{ or } I_1(2\pi\omega_1) = I_2(2\pi\omega_2)$$

$$\omega_2 = \frac{I_1\omega_1}{I_2} = \frac{I_1 \times 40}{\frac{2}{5} \times I_1} = 100\text{rev min}^{-1}$$

(b) Final K.E. = 2.5 Initial K.E.

$$\text{Final kinetic rotation, } E_F = \frac{1}{2}I_2\omega_2^2$$

$$\text{Initial kinetic rotation, } E_1 = \frac{1}{2}I_1\omega_1^2$$

$$\frac{E_F}{E_1} = \frac{\frac{1}{2}I_2\omega_2^2}{\frac{1}{2}I_1\omega_1^2}$$

$$= \frac{2}{5} \frac{I_1}{I_1} \frac{(100)^2}{(40)^2}$$

$$= \frac{2}{5} \times \frac{100 \times 100}{40 \times 40}$$

$$= \frac{5}{2} = 2.5$$

$$\therefore E_F = 2.5E_1$$

The increase in the rotational kinetic energy is attributed to the internal energy of the boy.

Page : 179 , Block Name : Exercise

Q7.14 A rope of negligible mass is wound round a hollow cylinder of mass 3 kg and radius 40

cm. What is the angular acceleration of the cylinder if the rope is pulled with a force of 30 N? What is the linear acceleration of the rope? Assume that there is no slipping.

Answer.

Here, $M = 3\text{kg}$, $R = 40\text{cm} = 0.4\text{m}$

Moment of inertia of the hollow cylinder about its axis.

$$I = MR^2 = 3(0.4)^2 = 0.48\text{kgm}^2$$

Force applied $F = 30\text{N}$

$$\therefore \text{Torque, } \tau = F \times R = 30 \times 0.4 = 12\text{N} - \text{m}.$$

If α is angular acceleration produced, then from $\tau = I\alpha$

$$\text{Linear acceleration, } a = R\alpha = 0.4 \times 25 = 10\text{ms}^{-2}$$

Page : 179 , Block Name : Exercise

Q7.15 To maintain a rotor at a uniform angular speed of 200 rad , an engine needs to transmit a torque of 180 Nm. What is the power required by the engine?

(Note: Uniform angular velocity in the absence of friction implies zero torque. In practice, applied torque is needed to counter frictional torque). Assume that the engine is 100 efficient.

Answer.

$$\omega = 200 \text{ rad s}^{-1} ; \text{Torque, } \tau = 180\text{N} - \text{m}$$

since, Power, $P = \text{Torque (T)} \times \text{angular speed (w)}$

$$= 180 \times 200 = 36000\text{watt} = 36\text{KW}$$

Page : 179 , Block Name : Exercise

Q7.16 From a uniform disk of radius R, a circular hole of radius R/2 is cut out. The centre of the hole is at R/2 from the centre of the original disc. Locate the centre of gravity of the resulting flat body.


Answer. $R/6$; from the original centre of the body and opposite to the centre of the cut portion.

Mass per unit area of the original disc = σ

Radius of the original disc = R

Mass of the original disc. $M = \pi R^2 \sigma$

The disc with the cut portion is shown in the following figure



Radius of the smaller disc = $\frac{R}{2}$

$$\pi \left(\frac{R}{2} \right)^2 \sigma = \frac{1}{4} \pi R^2 \sigma = \frac{M}{4}$$

Let O and O' be the respective centres of the original disc and the disc cut off from the original. As per the definition of the centre of mass, the center of mass of the original disc is supposed to be concentrated at O, while that of the smaller disc is supposed to be concentrated at O'.

It is given that

$$OO' = \frac{R}{2}$$

After the smaller disc has been cut from the original, the remaining portion is considered to be a system of two masses. The two masses are: M (concentrated at O), and

$$-M' \left(= \frac{M}{4} \right) \text{ concentrated at } O'$$

(The negative indicates that this portion has been removed from the original disc.)

Let x be the distance through which the centre of mass of the remaining portion shifts from point O.

The relation between the centres of masses of two masses is given as:

$$x = \frac{m_1 r_1 + m_2 r_2}{m_1 + m_2}$$

For the given system, we can write:


$$\begin{aligned} M \times 0 - M \times \left(\frac{R}{2} \right) \\ x = \frac{-M}{M + (-M')} \\ = \frac{-M}{M - \frac{M}{4}} = \frac{-MR}{8} \times \frac{4}{3M} = \frac{-R}{6} \end{aligned}$$

(The negative sign indicates that the centre of mass gets shifted toward the left of point O.)

Page : 179 , Block Name : Exercise

Q7.17 A metre stick is balanced on a knife edge at its centre. When two coins, each of mass 5g are put one on top of the other at the 12.0 cm mark, the stick is found to be balanced at 45.0 cm. What is the mass of the metre stick?

Answer. Let W and W' be the respective weights of the metre stick and the coin.

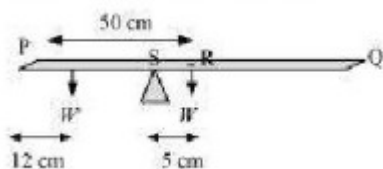

For equilibrium about C, the 45cm mark,

$$10g(45 - 12) = mg(50 - 45)$$

$$10g \times 33 = mg \times 5$$

$$\Rightarrow m = 10 \times 33/5$$

$$\text{or } m = 66 \text{ grams.}$$

Page : 179 , Block Name : Exercise

Q7.18 A solid sphere rolls down two different inclined planes of the same heights but different angles of inclination,

(a) Will it reach the bottom with the same speed in each case?

(b) Will it take longer to roll down one plane than the other?

(c) If so, which one and why?

Answer.

(a) Using law of conservation of energy,

$$\frac{1}{2}mv^2 + \frac{1}{2}I\omega^2 = mgh$$

$$\text{or } \frac{1}{2}mv^2 + \frac{1}{2}\left(\frac{2}{5}mR^2\right)\frac{v^2}{R^2} = mgh$$

$$\text{or } \frac{7}{10}v^2 = gh \text{ or } v = \sqrt{\frac{10gh}{7}}$$

since h is same for both the inclined planes therefore v is the same.

$$(b) \quad l = \frac{1}{2} \left(\frac{g \sin \theta}{1 + \frac{K^2}{R^2}} \right) t^2 = \frac{g \sin \theta}{2 \left(1 + \frac{2}{5} \right)} t^2 = \frac{5g \sin \theta}{14} t^2$$

$$\text{or } t = \sqrt{\frac{14l}{5g \sin \theta}}$$

$$\text{Now, } \sin \theta = \frac{h}{l} \quad \text{or } l = \frac{h}{\sin \theta}$$

$$\text{Now, } \sin \theta = \frac{h}{l} \quad \text{or } l = \frac{h}{\sin \theta}$$

$$\therefore t = \frac{1}{\sin \theta} \sqrt{\frac{14h}{5g}}$$

Lesser the value of θ , more will be t

(c) Clearly, the solid sphere will take longer to roll down the plane with smaller inclination.

Page : 179 , Block Name : Exercise

Q7.19 A hoop of radius 2 m weighs 100 kg. It rolls along a horizontal floor so that its centre of mass has a speed of 20 cm/s. How much work has to be done to stop it?

Answer.

Here, $R = 2\text{m}$, $M = 100\text{kg}$

$v = 20\text{cm/s} = 0.2\text{m/s}$

Total energy of the hoop $= \frac{1}{2}Mv^2 + \frac{1}{2}I\omega^2$

$$= \frac{1}{2}Mv^2 + \frac{1}{2}(MR^2)\omega^2$$

$$= \frac{1}{2}Mv^2 + \frac{1}{2}Mv^2 = Mv^2$$

Work required to stop the hoop = total energy of the hoop $W = Mv^2 = 100(0.2)^2 = 4 \text{ Joule}$.

Page : 179 , Block Name : Exercise

Q7.20 The oxygen molecule has a mass of 5.30×10^{-26} and a moment of inertia of $1.94 \times 10^{-46}\text{kgm}^2$ about an axis through its centre perpendicular to the lines joining the two atoms. Suppose the mean speed of such a molecule in a gas is 500 m/s and that its kinetic energy of rotation is two thirds of its kinetic energy of translation. Find the average angular velocity of the molecule.

Answer.

Mass of an oxygen molecule, $m = 5.30 \times 10^{-26}\text{kg}$

Moment of inertia, $I = 1.94 \times 10^{-46}\text{kgm}^2$

Velocity of the oxygen molecule, $v = 500\text{m/s}$

The separation between the two atoms of the oxygen molecule $= 2r$

Mass of each oxygen atom $= \frac{m}{2}$

Hence, moment of inertia I , is calculated as:

$$\left(\frac{m}{2}\right)r^2 + \left(\frac{m}{2}\right)r^2 = mr^2$$

$$r = \sqrt{\frac{I}{m}}$$

$$\sqrt{\frac{1.94 \times 10^{-46}}{5.36 \times 10^{-26}}} = 0.60 \times 10^{-10}\text{m}$$

$$K \cdot 36 \times 10^{-66}$$

$$\frac{1}{2}I\omega^2 = \frac{2}{3} \times \frac{1}{2} \times mv^2$$

$$mr^2\omega^2 = \frac{2}{3}mv^2$$

$$\omega = \sqrt{\frac{2}{3} \frac{v}{r}}$$


$$= \sqrt{\frac{2}{3}} \times \frac{500}{0.6 \times 10^{-10}}$$

$$= 6.80 \times 10^{12}\text{rad/s}$$

Q7.21 A solid cylinder rolls up an inclined plane of angle of inclination 30° . At the bottom of the inclined plane the centre of mass of the cylinder has a speed of 5 m/s.

- (a) How far will the cylinder go up the plane?
 (b) How long will it take to return to the bottom?

Answer. A solid cylinder rolling up an inclination is shown in the following figure.



Initial velocity of the solid cylinder, $v = 5 \text{ m/s}$

Angle of inclination, $\theta = 30^\circ$

Height reached by the cylinder $= h$

(a) Energy of the cylinder at point A:

$$KE_{\text{mt}} = KE_{\text{rmas}}$$

$$\frac{1}{2} I \omega^2 = \frac{1}{2} m v^2 = mgh$$

Moment of inertia of the solid cylinder, $I = \frac{1}{2} m r^2$

$$\therefore \frac{1}{2} \left(\frac{1}{2} m r^2 \right) \omega^2 + \frac{1}{2} m v^2 = mgh$$

$$\frac{1}{4} m r^2 \omega^2 + \frac{1}{2} m v^2 = mgh$$

$$\therefore \frac{1}{4} v^2 + \frac{1}{2} v^2 = gh$$

$$\frac{3}{4} v^2 = g/r$$

$$\therefore h = \frac{3}{4} \frac{v^2}{g}$$

$$= \frac{3}{4} \times \frac{5 \times 5}{9.8} = 1.91 \text{ m}$$

$$\sin \theta = \frac{BC}{AB}$$

$$\sin 30^\circ = \frac{h}{AB}$$

$$AB = \frac{1.91}{0.5} = 3.82 \text{ m}$$

(b) For radius of gyration K , the velocity of the cylinder at the instance when it rolls back to the bottom is given by the relation:

$$v = \left(\frac{2gh}{1 + \frac{K^2}{R^2}} \right)^{\frac{1}{2}}$$

$$\therefore v = \left(\frac{2g \Delta B \sin \theta}{1 + \frac{K^2}{R^2}} \right)^{\frac{1}{2}}$$


For the solid cylinder, $K^2 = \frac{R^2}{2}$

$$\begin{aligned}
 \therefore v &= \left(\frac{2gAB \sin \theta}{1 + \frac{1}{2}} \right)^{\frac{1}{2}} \\
 &= \left(\frac{4}{3} gAB \sin \theta \right)^{\frac{1}{2}} \\
 t &= \frac{AB}{v} \\
 &= \frac{AB}{\left(\frac{4}{3} gAB \sin \theta \right)^{\frac{1}{2}}} = \left(\frac{3AB}{4g \sin \theta} \right)^{\frac{1}{2}} \\
 &= \left(\frac{11.46}{19.6} \right)^{\frac{1}{2}} = 0.764\text{s}
 \end{aligned}$$


Therefore, the total time taken by the cylinder to return to the bottom is (2×0.754) 1.53 s.

Page : 179 , Block Name : Exercise

Q7.22 As shown in Fig. the two sides of a step ladder BA and CA are 1.6 m long and hinged at A. A rope DE, 0.5 m is tied halfway up. A weight 40 kg is suspended from a point F, 1.2 m from B along the ladder BA. Assuming the floor to be frictionless and neglecting the weight of the ladder, find the tension in the rope and forces exerted by the floor on the ladder. (Take $g = 9.8 \text{ m}^2$) (Hint: Consider the equilibrium of each side of the ladder separately.)

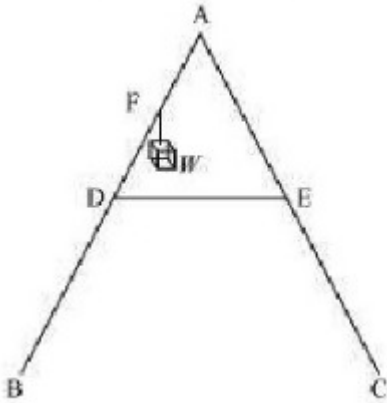

Answer.

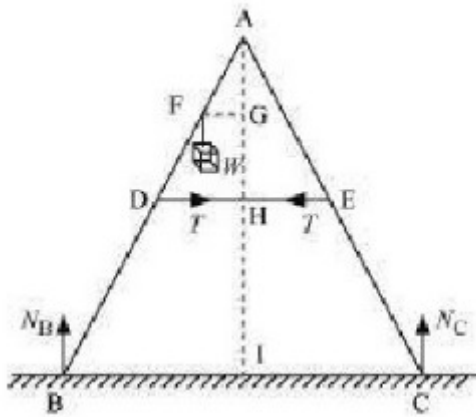

N_B = Force exerted on the ladder by the floor point B

N_C = Force exerted on the ladder by the floor point C

$$BA = CA = 1.6\text{m}$$

$$DE = 0.5\text{m}$$

$$BF = 1.2\text{m}$$

Mass of the weight, $m = 40\text{kg}$

$\triangle ABI$ and $\triangle AIC$ are similar

$$\therefore BI = IC$$

Hence, I is the midpoint of BC.

$$DE \parallel BC$$

$$BC = 2 \times DE = 1\text{m}$$

$$AF = BA - BF = 0.4\text{m} \dots (i)$$

D is the midpoint of AB .

Hence, we can write:

$$AD = \frac{1}{2} \times BA = 0.8\text{m}$$

Using equations (i) and (ii), we get:

$$FE = 0.4\text{m}$$

Hence, F is the midpoint of AD.

$FG \parallel DH$ and F is the midpoint of AD. Hence, G will also be the mid-point of AH .

$\triangle AFG$ and $\triangle ADH$ are similar

$$\therefore \frac{FG}{DH} = \frac{AF}{AD}$$

$$\frac{FG}{DH} = \frac{0.4}{0.8} = \frac{1}{2}$$

$$FG = \frac{1}{2} DH$$

$$FG = \frac{1}{2} DH$$

$$= \frac{1}{2} \times 0.25 = 0.125\text{m}$$

In $\triangle ADH$:

$$AH = \sqrt{AD^2 - DH^2}$$

$$= \sqrt{(0.8)^2 - (0.25)^2} = 0.76\text{m}$$

For translational equilibrium of the ladder, the upward force should be equal to the downward force.

$$N_c + N_B = mg = 392 \dots (iii)$$

For rotational equilibrium of the ladder, the net moment about A is:

$$-N_B \times BI + mg \times FG + N_c \times Cl + T \times AG - T \times AG = 0$$

$$-N_B \times 0.5 + 40 \times 9.8 \times 0.125 + N_C \times (0.5) = 0$$

$$(N_C - N_B) \times 0.5 = 49$$

$$N_C - N_B = 98$$

Adding equations (iii) and (iv), we get:

$$N_C = 245\text{N}$$

$$N_B = 147\text{N}$$

For rotational equilibrium of the side AB, consider the moment about A.

$$-N_B \times BI + mg \times FG + T \times AG = 0$$

$$-245 \times 0.5 + 40 \times 9.8 \times 0.125 + T \times 0.76 = 0$$

$$0.76T = 122.5 - 49$$

$$\therefore T = 96.7\text{N}$$

Page : 179 , Block Name : Additional Exercise

Q7.23 A man stands on a rotating platform, with his arms stretched horizontally holding a 5 kg weight in each hand. The angular speed of the platform is 30 revolutions per minute. The man then brings his arms close to his body with the distance of each weight from the axis changing from 90 cm to 20cm. The moment of inertia of the man together with the platform may be taken to be constant equal to 7.6 kg m^2 .

(a) What is his new angular speed? (Neglect friction.)

(b) Is kinetic energy conserved in the process? If not, from where does the change come about?

Answer.

(a) 58.88 rev/min (b) No

(a) Moment of inertia of the man-platform system = 7.6 kg m^2

Moment of inertia when the man stretches his hands to a distance of 90cm :

$$2 \times mr^2$$

$$= 2 \times 5 \times (0.9)^2$$

$$= 8.1 \text{ kg m}^2$$

Initial moment of inertia of the system, $I_1 = 7.6 + 8.1 = 15.7 \text{ kg m}^2$

Angular speed, $\omega = 300 \text{ rev/min}$

Angular momentum, $L_1 = I_1 \omega_1 = 15.7 \times 30$

Moment of inertia when the man folds his hands to a distance of 20 cm:

$$2 \times mr^2$$

$$= 2 \times 5(0.2)^2 = 0.4\text{kgm}^2$$

$$\text{Final moment of inertia, } I_\ell = 7.6 + 0.4 = 8\text{kgm}^2$$

$$\text{Final angular speed} = \omega_f$$

From the conservation of angular momentum, we have:

$$I_1\omega_1 = I_\ell\omega_f$$

$$\therefore \omega_f = \frac{15.7 \times 30}{8} = 58.88\text{rev/min}$$

(b) Kinetic energy is not conserved in the given process, In fact, with the decrease in the moment of inertia, kinetic energy increases. The additional kinetic energy comes from the work done by the man to fold his hands toward himself.

Page : 180 , Block Name : Additional Exercise

Q7.24 A bullet of mass 10 g and speed 500 m/s is fired into a door and gets embedded exactly at the centre of the door. The door is 1.0 m wide and weighs 12 kg. It is hinged at one end and rotates about a vertical axis practically without friction. Find the angular speed of the door just after the bullet embeds into it.

Answer.

$$\text{Mass of the bullet, } m = 10\text{g} = 10 \times 10^{-3}\text{kg}$$

$$\text{velocity of the bullet, } v = 500\text{m/s}$$

$$\text{Thickness of the door, } L = 1\text{m}$$

$$\text{Radius of the door, } r = \frac{1}{2}\text{m}$$

$$\text{Mass of the door, } M = 12\text{kg}$$

Angular momentum imparted by the bullet on the door:

$$a = mvr$$

$$= (10 \times 10^{-3}) \times (500) \times \frac{1}{2} = 2.5\text{kgm}^2\text{s}^{-1}$$

Moment of inertia of the door:

$$I = \frac{1}{3}ML^2$$

$$= \frac{1}{3} \times 12 \times (1)^2 = 4\text{kgm}^2$$

$$\text{But } \alpha = I\omega$$

$$\therefore \omega = \frac{\alpha}{I}$$

$$= \frac{2.5}{4} = 0.625\text{rads}^{-1}$$

Page : 180 , Block Name : Additional Exercise

Q7.25 Two discs of moments of inertia I_1 and I_2 about their respective axes (normal to the disc and passing through the centre), and rotating with angular speeds ω_1 and ω_2 are brought into contact face to face with their axes of rotation coincident. (a) What is the angular speed of the two-disc system? (b) Show that the kinetic energy of the combined system is less than the

sum of the initial kinetic energies of the two discs. How do you account for this loss in energy?
Take $\omega_1 \neq \omega_2$.

Answer.

(a)

Moment of inertia of disc I = I_1

Angular speed of disc I = ω_1

Angular speed of disc II = ω_2

Angular momentum of disc II = $I_2\omega_2$

Angular momentum of disc I, $L_1 = I_1\omega_1$

Angular momentum of disc II, $L_2 = I_2\omega_2$

Total initial angular momentum, $L_1 + L_2 = I_1\omega_1 + I_2\omega_2$

When the two discs are joined together, their moments of inertia get added up.

Moment of inertia of the system of two discs, $I = I_1 + I_2$

Moment of inertia of the system of two discs, $I = I_1 + I_2$

Let ω be the angular speed of the system.

Total final angular momentum, $L_f = (I_1 + I_2)\omega$

$$L_1 = L_f$$

$$I_1\omega_1 + I_2\omega_2 = (I_1 + I_2)\omega$$

$$\therefore \omega = \frac{I_1\omega_1 + I_2\omega_2}{I_1 + I_2}$$

(b) Kinetic energy of disc $E_1 = \frac{1}{2}I_1\omega_1^2$

Kinetic energy of Disc II $E_2 = \frac{1}{2}I_2\omega_2^2$

When the discs are joined, their moments of inertia get added up.

Moment of inertia of the system $I = I_1 + I_2$

Angular speed Of the system = ω

Final kinetic energy E_f :

$$= \frac{1}{2}(I_1 + I_2)\omega^2$$

$$= \frac{1}{2}(I_1 + I_2) \left(\frac{I_1\omega_1 + I_2\omega_2}{I_1 + I_2} \right)^2 = \frac{1}{2} \frac{(I_1\omega_1 + I_2\omega_2)^2}{I_1 + I_2}$$

$$\therefore E_1 - E_f$$

$$= \frac{1}{2}(I_1\omega_1^2 + I_2\omega_2^2) - \frac{(I_1\omega_1 + I_2\omega_2)^2}{2(I_1 + I_2)}$$

$$= \frac{1}{2}I_1\omega_1^2 + \frac{1}{2}I_2\omega_2^2 - \frac{1}{2} \frac{I_1^2\omega_1^2}{(I_1 + I_2)} - \frac{1}{2} \frac{I_2^2\omega_2^2}{(I_1 + I_2)} - \frac{1}{2} \frac{2I_1I_2\omega_1\omega_2}{(I_1 + I_2)}$$

$$= \frac{1}{(I_1 + I_2)} \left[\frac{1}{2}I_1^2\omega_1^2 + \frac{1}{2}I_1I_2\omega_1^2 + \frac{1}{2}I_1I_2\omega_2^2 + \frac{1}{2}I_2^2\omega_2^2 - \frac{1}{2}I_1^2\omega_1^2 - \frac{1}{2}I_2^2\omega_2^2 - I_1I_2\omega_1\omega_2 \right]$$

$$= \frac{I_1I_2}{2(I_1 + I_2)} [\omega_1^2 + \omega_2^2 - 2\omega_1\omega_2]$$

$$= \frac{I_1I_2(\omega_1 - \omega_2)^2}{2(I_1 + I_2)}$$

$$\therefore E_1 - E_1 > 0$$

$$E_1 > E_f$$

The loss of KE can be attributed to the frictional force that comes into play when the two discs come in contact with each other.

Page : 180 , Block Name : Additional Exercise


Q7.26 (a) prove the theorem Of perpendicular axes.

(Hint: Square of the distance of a point (x, y) in the X-Y plane from an axis through the origin perpendicular to the plane $x^2 + y^2$)

(b) Prove the theorem of parallel axes.

Answer. (a) The theorem of perpendicular axes states that the moment of inertia of a planar body (lamina) about an axis perpendicular to its plane is equal to the sum of its moments of inertia about two perpendicular axes concurrent with perpendicular axis and lying in the plane of the body.

A physical body with centre O and a point mass m, in the x y plane at (x, y) is shown in the following figure.

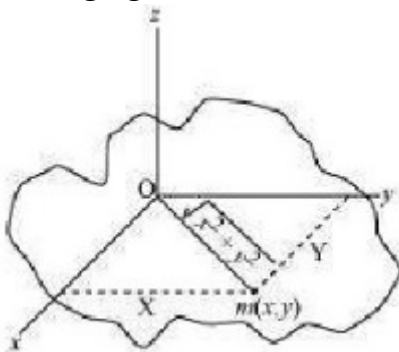

$$\text{Moment of inertia about } x\text{-axis, } I_x = mx^2$$

$$\text{Moment of inertia about } y\text{-axis, } I_y = my^2$$

$$I_x + I_y = mx^2 + my^2$$


$$= m(x^2 + y^2)$$

$$= m(\sqrt{x^2 + y^2})^2$$

$$I_x + I_y = I_z$$

Hence, the theorem is proved.

(b) The theorem of parallel axes states that the moment of inertia of a body about any axis is equal to the sum of the moment of inertia of the body about a parallel axis passing through its centre of mass and the product of its mass and the square of the distance between the two parallel axes.

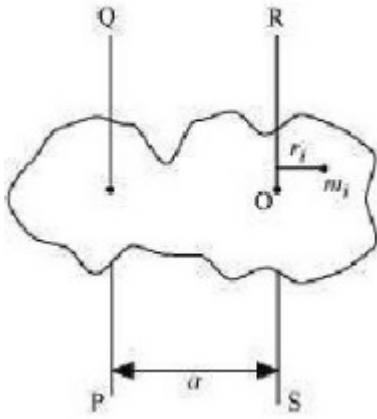

Suppose a rigid body is made up of n particles, having masses $m_1, m_2, m_3, \dots, m_n$ at perpendicular distances $r_1, r_2, r_3, \dots, r_n$ respectively from the centre of mass O of the rigid body.

The moment of inertia about axis RS passing through the point O :

$$I_{RS} = \sum_{i=1}^n m_i r_i^2$$

The perpendicular distance of mass from the axis $QP = a + r$,

Hence, the moment of inertia about axis QP :

$$\begin{aligned} I_{QP} &= \sum_{i=1}^n m_i (a + r_i)^2 \\ &= \sum_{i=1}^n m_i (a^2 + r_i^2 + 2ar_i) \\ &= \sum_{i=1}^n m_i a^2 + \sum_{i=1}^n m_i r_i^2 + \sum_{i=1}^n m_i 2ar_i \\ &= I_{RS} + \sum_{i=1}^n m_i a^2 + 2 \sum_{i=1}^n m_i ar_i \end{aligned}$$

Now, at the centre of mass, the moment of inertia of all the particles about the axis passing through the centre of mass is zero, that is,

$$2 \sum_{i=1}^n m_i ar_i = 0$$

$$\therefore a \neq 0$$

$$\therefore \sum m_i r_i = 0$$

Also

$$\sum_{i=1}^n m_i = M; M = \text{Total mass of the rigid body}$$

$$\therefore I_{QP} = I_{RS} + Ma^2$$


Hence, the theorem is proved.

Page : 180 , Block Name : Additional Exercise

Q7.27 Prove the result that the velocity v of translation of a rolling body (like a ring, disc, cylinder or sphere) at the bottom of an inclined plane of a height h is given by $v^2 = \frac{2gh}{(1+k^2/R^2)}$

Using dynamical consideration (i.e. by consideration of forces and torques). Note k is the radius of gyration of the body about its symmetry axis, and R is the radius of the body. The body starts from rest at the top of the plane.

Answer. A body rolling on an inclined plane of height h , is shown in the following figure:

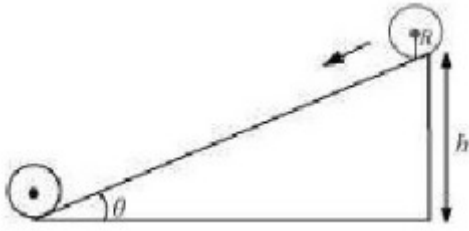

m = Mass of the body

R = Radius of the body

K = Radius of gyration of the body

v = Translational velocity of the body

h = Height of the inclined plane

g = Acceleration due to gravity

Total energy at the top of the plane, $E_1 = mgh$

$$= \frac{1}{2} I \omega^2 + \frac{1}{2} m v^2$$

$$I = m k^2 \text{ and } \omega = \frac{v}{R}$$

$$\therefore E_b = \frac{1}{2} (m k^2) \left(\frac{v^2}{R^2} \right) + \frac{1}{2} m v^2$$

$$= \frac{1}{2} m v^2 \frac{k^2}{R^2} + \frac{1}{2} m v^2$$

$$= \frac{1}{2} m v^2 \left(1 + \frac{k^2}{R^2} \right)$$

From the law of conservation of energy, we have:

$$E_T = E_b$$


$$mgh = \frac{1}{2} m v^2 \left(1 + \frac{k^2}{R^2} \right)$$

$$\therefore v = \frac{2gh}{(1+k^2/R^2)}$$

Hence, the given result is proved.

Page : 180 , Block Name : Additional Exercise

Q7.28 A disc rotating about its axis with angular speed ω_o is placed lightly (without any translational push) on a perfectly frictionless table. The radius of the disc is R . What are the linear velocities of the points A, B and C on the disc shown in Figure Will the disc roll in the direction indicated?

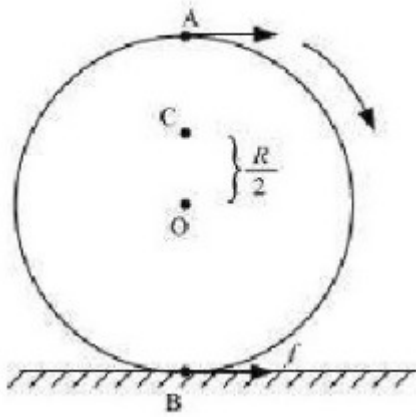

Answer. $v_A = R\omega_{oi}$; $v_B = R\omega_{oi}$

Angular speed of the disc $= \omega_0$

Radius of the disc $= R$

Using the relation for linear velocity, $v = \omega_0 R$

For point A:

$v_A = R\omega_0$; in the direction tangential to the right


For point B:

$v_B = R\omega_0$; in the direction tangential to the left

For point C:

$v_c = \left(\frac{R}{2}\right)\omega_o$, in the direction same as that of v_A

The directions of motion of points A, B, and C on the disc are shown in the following figure

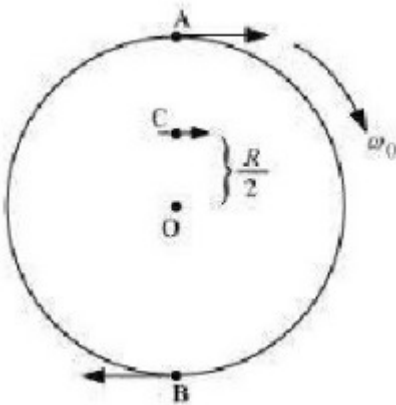

Since the disc is placed on a frictionless table, it will not roll. This is because the presence of friction is essential for the rolling of a body.

Page : 180 , Block Name : Additional Exercise

Q7.29 Explain why friction is necessary to make the disc in Figure roll in the direction indicated.

(a) Give the direction of frictional force at B, and the sense of frictional torque, before perfect rolling begins.

(b) What is the force of friction after perfect rolling begins?

Answer. A torque is required to roll the given disc. As per the definition of torque, the rotating force should be tangential to the disc. Since the frictional force at point B is along the tangential force at point A, a frictional force is required for making the disc roll.

(a) Force of friction acts opposite to the direction of velocity at point B. The direction of linear velocity at point B is tangentially leftward. Hence, frictional force will act tangentially rightward. The sense of frictional torque before the start of perfect rolling is perpendicular to the plane of the disc in the outward direction.

(b) Since frictional force acts opposite to the direction of velocity at point B, perfect rolling will begin when the velocity at that point becomes equal to zero. This will make the frictional force acting on the disc zero.

Page : 180 , Block Name : Additional Exercise

Q7.30 A solid disc and a ring, both of radius 10 cm are placed on a horizontal table simultaneously, with initial angular speed equal to 10 rad s^{-1} . Which of the two will start to roll earlier? The coefficient of kinetic friction is $\mu_k = 0.2$.

Answer.

Radius of the ring and the disc, $r = 10 \text{ cm} = 0.1 \text{ m}$

Initial angular speed, $\omega_0 = 10 \text{ rad s}^{-1}$

coefficient of kinetic friction, $\mu_k = 0.2$

Initial velocity of both the objects, $u = 0$

Motion of the two objects is caused by frictional force. As per Newton's second law of motion, we have frictional force, $f = ma$

$$\mu_k mg = ma$$

Where,

a = Acceleration produced in the objects

m = Mass

$$\therefore a = \mu_k g \dots (i)$$

As per the first equation of motion, the final velocity of the objects can be obtained as:

$$v = u + at$$

$$= 0 + \mu_k gt$$

$$= \mu_k gt \dots (ii)$$

The torque applied by the frictional force will act in perpendicularly outward direction and cause reduction in the initial angular speed.

$$\text{Torque, } T = -Ia$$

a = Angular acceleration

$$\mu_k mgr = -Ia$$

$$\therefore \alpha = \frac{-\mu_k mgr}{I}$$

Using the first equation of rotational motion to obtain the final angular speed

$$\begin{aligned}\omega &= \omega_0 + \alpha t \\ &= \omega_0 + \frac{-\mu_1 mgr}{I}\end{aligned}$$

$$\begin{aligned}\omega &= \omega_0 + \alpha t \\ &= \omega_0 + \frac{-\mu_s mgr}{I}t\end{aligned}$$

Rolling starts when linear velocity, $v = r\omega$

$$\therefore v = r \left(\omega_0 - \frac{\mu_k g m r t}{I} \right)$$

Equating equations (ii) and (v), we get:

$$\mu_1 g t = r \left(\omega_0 - \frac{\mu_1 g m r t}{I} \right)$$

$$= r\omega_0 - \frac{\mu_k g m r^2 t}{I}$$

For the ring: $I = mr^2$

$$\therefore \mu_L g t = r\omega_0 - \frac{\mu_k g m r^2 t}{mr^2}$$

$$2\mu_k g t = r\omega_0$$

$$\therefore t_r = \frac{r\omega_0}{2\mu_k g}$$

$$= \frac{0.1 \times 10 \times 3.14}{2 \times 0.2 \times 9.8} = 0.80s$$

$$I = \frac{1}{2}mr^2$$

$$\therefore \mu_k g t_d = r\omega_0 \frac{\mu_k g m r^2 t}{\frac{1}{2}mr^2}$$

$$= r\omega_0 - 2\mu_k g t$$

$$\therefore t_d = \frac{r\omega_0}{3\mu_k g}$$

$$= \frac{0.1 \times 10 \times 3.14}{3 \times 0.2 \times 9.8} = 0.53s$$

Since $t_d > t_r$, the disc will start rolling before the ring.

Page : 180 , Block Name : Additional Exercise

Q7.31 A cylinder of mass 10 kg and radius 15 cm is rolling perfectly on a plane of inclination 30° . The coefficient of static friction $\mu_s = 0.25$.

(a) How much is the force of friction acting on the cylinder?

(b) What is the work done against friction during rolling?

(c) If the inclination θ of the plane is increased, at what value of θ does the cylinder begin to skid, and not roll perfectly?

Answer.


Mass of the cylinder, $m = 10\text{kg}$

Radius of the cylinder, $r = 15\text{cm} = 0.15\text{m}$

Coefficient of kinetic friction, $\mu_k = 0.25$

Angle of inclination, $\theta = 30^\circ$

Moment of inertia of a solid cylinder about its geometric axis, $I = \frac{1}{2}mr^2$

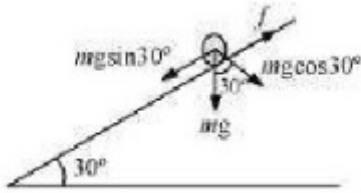

The acceleration of the cylinder is given as:

$$\begin{aligned}
 a &= \frac{mg \sin \theta}{m + \frac{I}{r^2}} \\
 &= \frac{mg \sin \theta}{m + \frac{1}{2} \frac{mr^2}{r^2}} = \frac{2}{3} g \sin 30^\circ \\
 &= \frac{2}{3} \times 9.8 \times 0.5 = 3.27 \text{ m/s}^2
 \end{aligned}$$

(a) Using Newton's second law of motion, we can write net force as:

$$\begin{aligned}
 f_{\text{net}} &= ma \\
 mg \sin 30^\circ - f &= ma \\
 f &= mg \sin 30^\circ - ma \\
 &= 10 \times 9.8 \times 0.5 - 10 \times 3.27 \\
 &= 49 - 32.7 = 16.3 \text{ N}
 \end{aligned}$$

(b) During rolling, the instantaneous point of contact with the plane comes to rest. Hence, the work done against frictional force is zero.

(c) For rolling without skid, we have the relation:

$$\begin{aligned}
 \mu &= \frac{1}{3} \tan \theta \\
 \tan \theta &= 3\mu = 3 \times 0.25 \\
 \therefore \theta &= \tan^{-1}(0.75) = 36.87^\circ
 \end{aligned}$$

Page : 180 , Block Name : Additional Exercise

Q7.32 Read each statement below carefully, and state, with reasons, if it is true or false;

- (a) During rolling, the force of friction acts in the same direction as the direction of motion of the CM of the body.
- (b) The instantaneous speed of the point of contact during rolling is zero.
- (c) The instantaneous acceleration of the point of contact during rolling is zero.
- (d) For perfect rolling motion, work done against friction is zero.
- (e) A wheel moving down a perfectly frictionless inclined plane will undergo slipping (not rolling) motion.

Answer. (a) False

Frictional force acts opposite to the direction of motion of the centre of mass of a body. In the case of rolling, the direction of motion of the centre of mass is backward. Hence, frictional force acts in the forward direction.

(b) True

Rolling can be considered as the rotation of a body about an axis passing through the point of contact of the body with the ground. Hence, its instantaneous speed is zero.

(c) False

When a body is rolling, its instantaneous acceleration is not equal to zero. Its value.

(d) True

as some When perfect rolling begins, the frictional force acting at the lowermost point becomes zero. Hence, the work done against friction is also zero.

(e) True

The rolling of a body occurs when a frictional force acts between the body and the surface. This frictional force provides the torque necessary for rolling. In the absence of a frictional force, the body slips from the inclined plane under the effect of its own weight.

Page : 180 , Block Name : Additional Exercise

Q7.33 Separation of Motion of a system of particles into motion of the centre of mass and motion about the centre of mass:

(a) Show $\mathbf{p}_i = \mathbf{p}'_i + m_i \mathbf{V}$

Where $\mathbf{p}_i$ is the momentum of the i^{th} particle (of mass m_i) and $\mathbf{p}'_i = m_i \mathbf{v}'_i$. Note $\mathbf{v}'_i$ is the velocity of the i^{th} particle relative to the centre of mass.

Also, prove using the definition of the centre of mass $\sum_i \mathbf{p}'_i = 0$

(b) Show $K = K' + 1/2 MV^2$

Where K is the total kinetic energy of the system of particles, K' is the total kinetic energy of the system when the particle velocities are taken with respect to the centre of mass and $MV^2/2$ is the kinetic energy of the translation of the system as a whole (i.e. of the centre of mass motion of the system). The result has been used in Sec. 7.14.

(c) Show $\mathbf{L} = \mathbf{L}' + \mathbf{R} \times M\mathbf{V}$

Where $\mathbf{L}' = \sum_i \mathbf{r}'_i \times \mathbf{p}'_i$ is the angular momentum of the system about the centre of mass with velocities taken relative to the centre of mass. Remember $\mathbf{r}'_i = \mathbf{r}_i - \mathbf{R}$, rest of the notation is the standard notation used in the chapter. Note $\mathbf{L}'$ and $M\mathbf{R} \times \mathbf{V}$ can be said to be angular momenta, respectively, about and of the centre of mass of the system of particles.

(d) Show $\frac{d\mathbf{L}'}{dt} = \sum_i \mathbf{r}'_i \times \frac{d}{dt}(\mathbf{p}'_i)$

Further, show that $\frac{d\mathbf{L}'}{dt} = \boldsymbol{\tau}'_{\text{ext}}$

where $\boldsymbol{\tau}'_{\text{ext}}$ is the sum of all external torques acting on the system about the centre of mass.

(Hint: Use the definition of centre of mass and Newton's Third Law. Assume the internal forces between any two particles act along the line joining the particles.)

Answer. (a) Take a system of i moving particles.

Mass of the i^{th} particle = m_i

Velocity of the i^{th} particle = $\mathbf{v}_i$

Hence, momentum of the i^{th} particle, $\mathbf{p}_i = m_i \mathbf{v}_i$

Velocity of the centre of mass = $\mathbf{V}$

The velocity of the i^{th} particle with respect to the centre of mass of the system is given as:

$$\mathbf{v}'_i = \mathbf{v}_i - \mathbf{V} \dots (1)$$

Multiplying m_i throughout equation (1), we get:

$$\mathbf{m}_i \mathbf{v}'_i = \mathbf{m}_i \mathbf{v}_i - \mathbf{m}_i \mathbf{V}$$

$$\mathbf{p}'_i = \mathbf{p}_i - m_i \mathbf{V}$$

Where,

$\mathbf{p}'_i = \mathbf{m}_i \mathbf{v}'_i$ = Momentum of the i^{th} particle with respect to the centre of mass of the system

$$\therefore \mathbf{p}_i = \mathbf{p}'_i + \mathbf{m}_i \mathbf{V}$$

We have the relation: $\mathbf{p}'_i = \mathbf{m}_i \mathbf{v}'_i$

Taking the summation of momentum of all the particles with respect to the centre of mass of the system, we get:

$$\sum_i \mathbf{p}'_i = \sum_i m_i \mathbf{v}'_i = \sum_i m_i \frac{d\mathbf{r}'_i}{dt}$$

Where,

$\mathbf{r}'_i$ = Position vector of i th particle with respect to the centre of mass

$$\mathbf{v}'_i = \frac{d\mathbf{r}'_i}{dt}$$

As per the definition of the centre of mass, we have:

$$\sum_T m \mathbf{r}'_i = 0$$

$$\therefore \sum_i m_j \frac{d\mathbf{r}'_i}{dt} = 0$$

$$\sum_f \mathbf{p}'_i = 0$$

(b) We have the relation for velocity of the i^{th} particle as:

$$\mathbf{v}_i = \mathbf{v}'_i + \mathbf{V}$$

$$\sum_i m_1 \mathbf{v}_i = \sum_i m_i \mathbf{v}'_i + \sum_i m_i \mathbf{V} \dots (2)$$

Taking the dot product of equation (2) with itself, we get:

$$\sum_i m_i \mathbf{v}_i \cdot \sum_i m_i \mathbf{v}_i = \sum_i m_i (\mathbf{v}'_i + \mathbf{V}) \cdot \sum_i m_i (\mathbf{v}'_i + \mathbf{V})$$

$$M^2 \sum_i v_i^2 = M^2 \sum_i v_i'^2 + M^2 \sum_i \mathbf{v}_i \cdot \mathbf{v}'_i + M^2 \sum_i \mathbf{v}'_i \cdot \mathbf{v}_i + M^2 V^2$$

Here, for the centre of mass of the system of particles, $\sum_i \mathbf{v}_i \mathbf{v}'_i = - \sum_i \mathbf{v}'_i \mathbf{v}_i$

$$M^2 \sum_i v_i^2 = M^2 \sum_i v_i'^2 + M^2 V^2$$

$$\frac{1}{2} M \sum_i v_i^2 = \frac{1}{2} M \sum_i v_i'^2 + \frac{1}{2} M V^2$$

$$K = K' + \frac{1}{2} M V^2$$

Where $k = \frac{1}{2} M \sum_i v_i^2$ = Total kinetic energy of the system of particles

$\kappa' = \frac{1}{2} M \sum_i v_i'^2$ Total kinetic energy of the system of particles with respect to the centre of mass

$\frac{1}{2} M V^2$ Kinetic energy of the translation of the system as a whole

(c) Position vector of the i^{th} particle with respect to origin = $\mathbf{r}_i$

Position vector of the i^{th} particle with respect to the centre of mass = $\mathbf{r}'_i$

Position vector of the centre of mass with respect to the origin = $\mathbf{R}$

It is given that:

$$\mathbf{r}'_i = \mathbf{r}_i - \mathbf{R}$$

$$\mathbf{r}_i = \mathbf{r}'_i + \mathbf{R}$$

We have from part (a)

$$\mathbf{p}_i = \mathbf{p}'_i + m_i \mathbf{V}$$

Taking the cross product of this relation by $\mathbf{r}_i$, we get:

$$\sum_i \mathbf{r}_i \times \mathbf{p}_i = \sum_i \mathbf{r}_i \times \mathbf{p}'_i + \sum_i \mathbf{r}_i \times m_i \mathbf{V}$$

$$\mathbf{L} = \sum_i (\mathbf{r}'_i + \mathbf{R}) \times \mathbf{p}'_i + \sum_i (\mathbf{r}'_i + \mathbf{R}) \times m_i \mathbf{V}$$

$$= \sum_i \mathbf{r}'_i \times \mathbf{p}'_i + \sum_i \mathbf{R} \times \mathbf{p}'_i + \sum_i \mathbf{r}'_i \times m_i \mathbf{V} + \sum_i \mathbf{R} \times m_i \mathbf{V}$$

$$= \mathbf{L}' + \sum_i \mathbf{R} \times \mathbf{p}'_i + \sum_i \mathbf{r}'_i \times m_i \mathbf{V} + \sum_i \mathbf{R} \times m_i \mathbf{V}$$

$$\mathbf{R} \times \sum \mathbf{p}'_i = 0 \text{ and}$$

$$(\sum_i \mathbf{r}'_i) \times M \mathbf{V} = \mathbf{0}$$

$$\sum_i m_i = M$$

$$\therefore \mathbf{L} = \mathbf{L}' + \mathbf{R} \times M \mathbf{V}$$

(d) We have the relation:

$$\mathbf{L}' = \sum_i \mathbf{r}'_i \times \mathbf{p}'_i$$

$$\frac{d\mathbf{L}'}{dt} = \frac{d}{dt} (\sum_i \mathbf{r}'_i \times \mathbf{p}'_i)$$

$$= \frac{d}{dt} (\sum_i \mathbf{r}'_i) \times \mathbf{p}'_i + \sum_i \mathbf{r}'_i \times \frac{d}{dt} (\mathbf{p}'_i)$$

$$= \frac{d}{dt} (\sum_i m_i \mathbf{r}'_i) \times \mathbf{v}'_i + \sum_i \mathbf{r}'_i \times \frac{d}{dt} (\mathbf{p}'_i)$$

Where, $\mathbf{r}'_i$ is the position vector with respect to the centre of mass of the system of particles.

$$\therefore \sum_i m_i \mathbf{r}'_i = \mathbf{0}$$

$$\therefore \frac{d\mathbf{L}'}{dt} = \sum_i \mathbf{r}'_i \times \frac{d}{dt} (\mathbf{p}'_i)$$

We have the relation:

$$\frac{d\mathbf{L}'}{dt} = \sum_i \mathbf{r}'_i \times \frac{d}{dt} (\mathbf{p}'_i)$$

$$= \sum_i \mathbf{r}'_i \times m_i \frac{d}{dt} (\mathbf{v}'_i)$$

Where, $\frac{d}{dt} (\mathbf{v}'_i)$ is the rate of change of velocity of the i^{th} particle with respect to the centre of mass of the system

Therefore, according to Newton's third law of motion, we can write:

$$m_i \frac{d}{dt} (\mathbf{v}'_i) = \text{External force acting on the } i^{th} \text{ particle} = \sum_i (\tau'_i)_{est}$$

$$\text{i.e., } \sum_i \mathbf{r}'_i \times m_i \frac{d}{dt} (\mathbf{v}'_i) = \tau'_{est} = \text{External torque acting on the system as a whole}$$

$$\therefore \frac{d\mathbf{L}'}{dt} = \tau'_{est}$$

